


PARAPROJECT® CASE N12

CHARGE, TRANSPORT & PROTECT

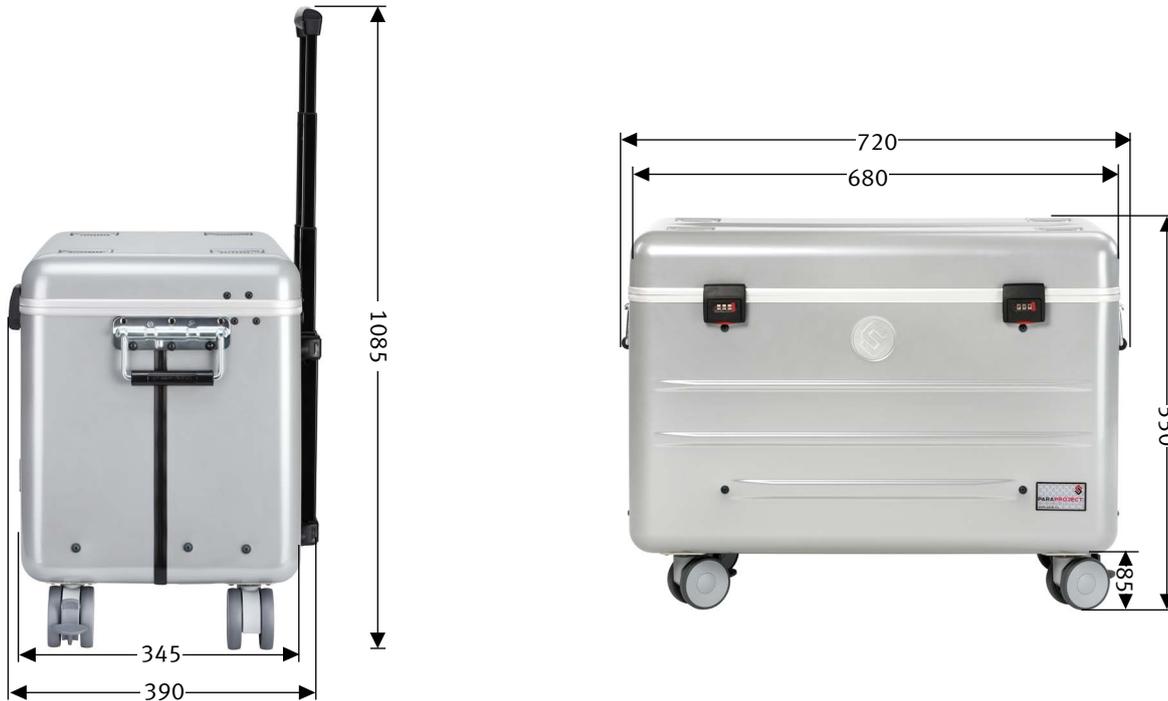

dimensions in mm


description	PARAPROJECT® CASE N12 for MacBook / ultrabook / chromebook up to 15,6"; silver	
part number	EU version: 208.418-179	CH version: 208.419-179
GTIN / EAN	4006793809796	4006793000322
field of application	education, health care	
certificates	CE / RoHS / REACH	
applicable standards	DIN EN 60950-1 / DIN EN 55022 / DIN EN 55024	
scope of delivery	- 1x device connection cable EU, length: 5 m - 6x y-adapter with 2x Euro-8 socket (C7, 2-pin) - 1x user guide for combination lock	- 1x device connection cable CH, length: 5 m - 6x y-adapter with 2x Euro-8 socket (C7, 2-pin) - 1x user guide for combination lock
materials	- outer shell made from UV-proof ABS-PMMA plastic with a wall thickness of 3 mm, silver - circumferential aluminum frame on lid and body - pockets made from „Con-Pearl®“ material - bottom tray of the case is fully lined with foam material	
transport	- 4x smooth-running ball bearings (with 2 lockable castors) - telescopic handle, 4-fold - carrying handles on both sides	
external dimensions	width 720 x depth 390 x height 550 mm	
empty weight	13.2 kg	
shipping weight	13.7 kg	
transport dimensions	width 760 x depth 420 x height 570 mm	
number of euro-pallets	6	
dimensions of euro-pallet	width 1200 x depth 800 x height 1860 mm	
customs tariff no.	42021250	
country of origin	EU	

PARAPROJECT® CASE N12

CHARGE, TRANSPORT & PROTECT

equipment	<ul style="list-style-type: none"> - case lid: with diverse pockets and compartments and additional storage for access point - body: 12x storage compartment for laptops up to 15.6", storage for a total of 12x original power units to charge the laptops, internal timer to set charge time limit and separate port for access point - additionally: air vents in the lid and bottom tray ensure optimum air circulation 	
compatible devices	MacBook / ultrabook / chromebook	
max. number of devices	12	
operating system	Windows / Chrome OS / Mac OS	
Screen size	bis 15.6"	
cable types for equipment	y-adapter with 2x Euro-8 socket (C7, 2-pin)	
power supply	use of customer's own power supply units	
output power per port	width 120 x depth 55 x height 40 mm	
max. dim per power supply	max. 2.5 A	
optional accessories	<ul style="list-style-type: none"> - y-adapter with 2x Euro flat plug - y-adapter with 2x IBM ports (C5, 3-pin) 	
locking system	combination lock	
connections	<p>outside:</p> <ul style="list-style-type: none"> - central power supply with protective cap <p>inside:</p> <ul style="list-style-type: none"> - 10x IBM ports (C5, 3-pin) - 2x SCHUKO socket outlet 	<p>outside:</p> <ul style="list-style-type: none"> - central power supply with protective cap <p>inside:</p> <ul style="list-style-type: none"> - 10x IBM ports (C5, 3-pin) - 2x CH socket
data of currents	<ul style="list-style-type: none"> - 100 - 240 V - max. 10 A - 50/60 Hz 	
dimensions of pockets	width 255 x depth 45 x height 320 mm	
dimensions of other compartments	width 175 x depth 55 x height 320 mm	

dimensions in mm

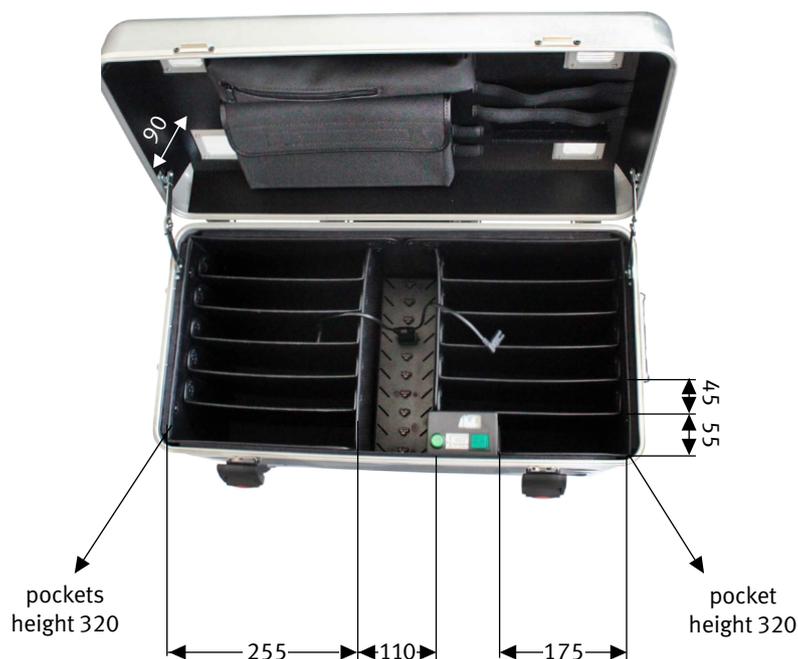

12x pockets for notebooks



switch on/off



central power supply with protective cap